
ECO-RIDGE



An oversized brick shape with a slightly textured riven surface. Slightly chamfered edges with a 3% open surface area. Joint opening which is compliant with the Americans with Disabilities Act. (ADA)

Environmental Pavers








ECO-RIDGE

WIDTH	LENGTH	THICKNESS	SF / PALLET	PCS / PALLET	LBS / PALLET
43/4"	9½"	31/8"	100	320	3,389

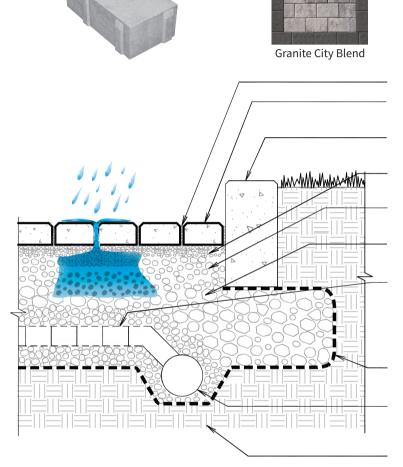





naver-shield"

Oyster Blend*

*Premium color

#8,89 OR 9 AGGREGATE IN OPENINGS

NICOLOCK'S ECO-TRE PAVERS 31/8" (80mm) THICK FOR **VEHICULAR TRAFFIC**

CURB/EDGE RESTRAINT WITH CUT-OUTS FOR OVERFLOW DRAINAGE (CURB SHOW)

BEDDING COURSE 11/2" TO 2" (40 TO 50 mm) THICK (# 8 AGGREGATE)

4" (100mm) THICK # 57 STONE OPEN-GRADED BASE

MIN. 6" (150mm) THICK # 2 STONE SUBBASE

PERFORATED PIPE SPACED AND SLOPED TO DRAIN STORED WATER. EMBED PIPE IN # 57 STONE

NONWOVEN GEOTEXTILE WHEN REQUIRED BY **DESIGN ENGINEER**

NON-PERFORATED OUTFALL PIPE(S) SLOPED TO STORM SEWER OR STREAM. EMBED PIPE IN #57 STONE

SOIL SUBGRADE SLOPED TO DRAIN

DISCLAIMER: These typical details are provided for general information purposes only. Anyone making use of these details does so at their own risk and assumes all liability for such use. Site specific design should be performed by a licensed professional engineer who is familiar with actual site conditions, soil, other materials and local practices.

NOTES:

- Subgrade must have adequate bearing capacity and be suitable for infiltration practices. Do not compact unless specified by design engineer. 1.
- 2. Pavers, aggregate base and subbase must be properly compacted.
- # 2 stone may be replaced with # 3 or # 4 stone. 3.
- Pavers shall be installed with a surface tolerance of ±3%" over 10ft with no paver lippage greater than 1/8"
- Consult ICPI's current permeable pavement design manual for design and installation information.



