

POMPEII



POMPEII: Granite City Blend (Running Bond)

LIVE LIFE IN COLOR!

NICOLock[®]
paving stones & retaining walls
 paver-shield[™]

POMEII



FEATURES

- Multi-size rectangular shapes
- Dimpled surface
- Textured edges
- No spacer lugs



COLOR SELECTION



charcoal blend antiqued



granite city blend antiqued



oyster blend antiqued*

* denotes premium color


SPECIFICATIONS

	width	length	thickness	s.f./per pc.	s.f./pallet	pcs./pallet	lbs./pallet
A	2-3/4"	3-1/4"	2-3/8"		65	116	2,592
B	2-3/4"	4"	2-3/8"			120	
C	3-1/4"	4"	2-3/8"			126	
D	3-5/8"	4"	2-3/8"			99	
E	4"	4"	2-3/8"			126	

INSTALLATION GUIDELINES: SAND

After excavation, compact the subgrade and install a woven separation fabric. Spread and compact a base of clean, graded, dense aggregate (road base). Typical compacted base thickness is 4-6" for pedestrian applications. Pavers are set on a loosely screeded 1" bed of graded, clean concrete sand. Maintain a joint size of 1/16" - 3/16". When pavers are set, compact paving stones into sand with mechanical plate vibrator. Joint sand may be spread over paving stones during compaction. Installed pavers should be set 1/8" to 1/4" above final elevations to compensate for any potential settlement. Spread clean dry sand over surface and broom sweep to fill joints.

CROSS-SECTION OF TYPICAL INSTALLATION

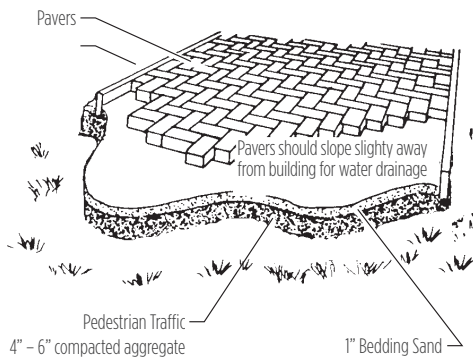

NOTE: All measurements are nominal. Variance in square footage or linear footage coverage can be up to 5% depending on joint width. The possible occurrence of efflorescence does not affect the structural integrity of the product. Efflorescence is a normal occurrence in concrete products and will dissipate with normal weathering. The use of concrete as a base or setting bed may increase the possibility of efflorescence.

CAUTION: Always use a plate compactor with a pad when installing any textured paving stone.



| nicolock.com

nicolock[®]
paving stones & retaining walls
n paver-shield[™]