OLD TOWN FLAGSTONE QUARTERED SQUARE

This classic design features a series of rectangular bands of slabs running out from a single central unit and radial lines that provide the quartered effect. Although visually conplex, it is easy to create a 9 foot square as the mitered corner is in fact a single unit. Authentic character of reclaimed flagstone in a circular design with stone cut edges.



Circles and Inlays




Old Town Flagstone Quartered Square | Color: Bluestone




OLD TOWN FLAGSTONE QUARTERED SQUARE

| | WIDTH | LENGTH | THICKNESS | SF / PALLET | PCS / PALLET | LBS / PALLET |
|---|-------|--------|-----------|-------------|--------------|--------------|
| Α | 12" | 12" | 11/2" | 1 | 1 | |
| в | 18" | 18" | 1½" | 32 | 16 | 1,424 |
| с | 12" | 24" | 1½" | 48 | 24 | |



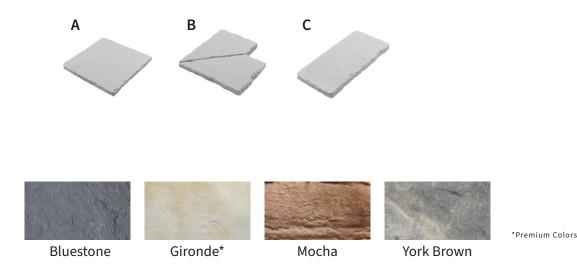

CROSS-SECTION OF TYPICAL INSTALLATION

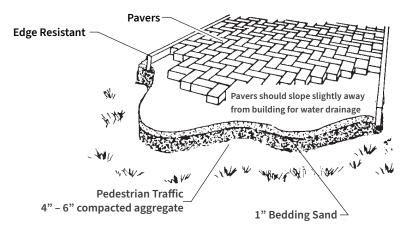

INSTALLATION GUIDELINES: SAND

After excavation, compact the sub grade and install a woven separation fabric if needed. Spread and compact a base of clean, dense graded aggregate (road base). Typical compacted base thickness is 4-6" for pedestrian applications. Pavers are set on a loosely screened 1" bed of graded, clean concrete sand. Maintain a joint size of 1/16" – 3/16". When pavers are set, compact paving stones into sand with mechanical plate vibrator. Joint sand may be spread over paving stones during compaction. Installed pavers should be set 1/8" to 1/4" above final elevations to compensate for any potential settlement. Spread clean dry sand over surface and broom sweep to fill joints. Run vibrator one final time after filling joints.

NOTE: All measurements are nominal. Variance in square footage or linear footage coverage can be up to 5% depending on joint width. The possible occurrence of efflorescence does not affect the structural integrity of the product. Efflorescence is a normal occurrence in concrete products and will dissipate with normal weathering. The use of concrete as a base or setting bed may increase the possibility of efflorescence.

CAUTION: Always use a plate compactor with a pad when installing any textured paving stone.

🕤 in. 🚻 🗲 😰 🐻

PAVING STORES • RETAINING WALLS • OUTDOOR LIVING paver-shield

Corporate HQ: 612 Muncy Avenue | Lindenhurst | NY | 11757 | 631.669.0700 | nicolock.com