

# PLANK PAVER

The long and narrow design gives a finished and sleek appearance to complement modern design trends in both residential and commercial applications.

103 sq. ft. per pallet • 189 pcs per pallet • 3,275 lbs per pallet



Plank Paver | paver-shield™

## APPLICATIONS:

- DRIVEWAYS
- PATIOS
- WALKWAYS

Nicolock paver-shield™ have a tight, smooth surface texture and will not expose heavy aggregate as they wear. Ultra-dense surface has more color and more protection. Nicolock has color from top to bottom throughout the paver ensuring a lifetime of beauty. Iron oxide pigments are **guaranteed not to fade!**



Plank Paver shown in Granite City Blend




# PLANK PAVER


## DIMENSIONS

	width	length	thickness
a	6"	9"	2¾"
b	6"	13"	2¾"
c	6"	17"	2¾"

Available colors:




Charcoal




Golden Brown Blend




Granite City Blend




Marble Blend\*



Raven\*



Pewter




Westchester Blend

\*Premium Colors


### INSTALLATION GUIDELINES: SAND

After excavation, compact the sub grade and install a woven separation fabric if needed. Spread and compact a base of clean, dense graded aggregate (road base). Typical compacted base thickness is 4-6" for pedestrian applications. Pavers are set on a loosely screened 1" bed of graded, clean concrete sand. Maintain a joint size of 1/16" – 3/16". When pavers are set, compact paving stones into sand with mechanical plate vibrator. Joint sand may be spread over paving stones during compaction. Installed pavers should be set 1/8" to 1/4" above final elevations to compensate for any potential settlement. Spread clean dry sand over surface and broom sweep to fill joints. Run vibrator one final time after filling joints.

### NICOLock PAVING STONE 1"-3 1/8" THICK

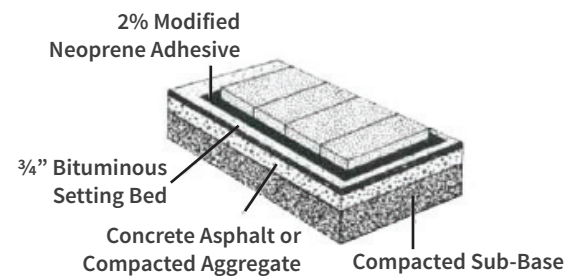

### CROSS-SECTION OF TYPICAL INSTALLATION

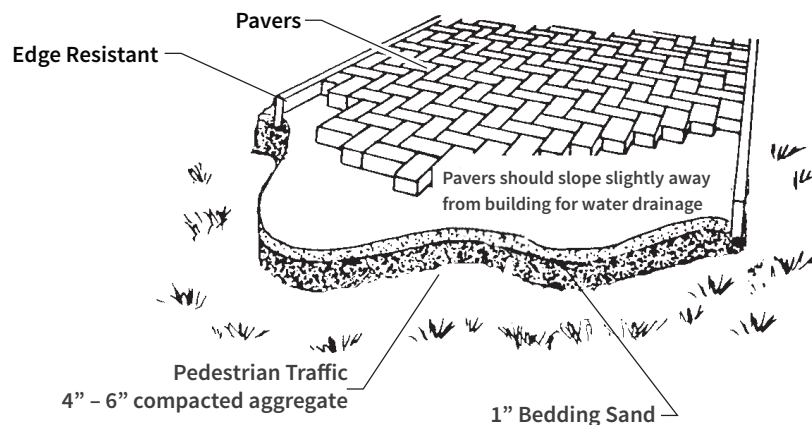

**NOTE:** All measurements are nominal. Variance in square footage or linear footage coverage can be up to 5% depending on joint width. The possible occurrence of efflorescence does not affect the structural integrity of the product. Efflorescence is a normal occurrence in concrete products and will dissipate with normal weathering. The use of concrete as a base or setting bed may increase the possibility of efflorescence.

**CAUTION:** Always use a plate compactor with a pad when installing any textured paving stone.



Corporate HQ: 612 Muncy Avenue | Lindenhurst | NY | 11757 | 631.669.0700 | nicolock.com

